


SUMO COUPLING

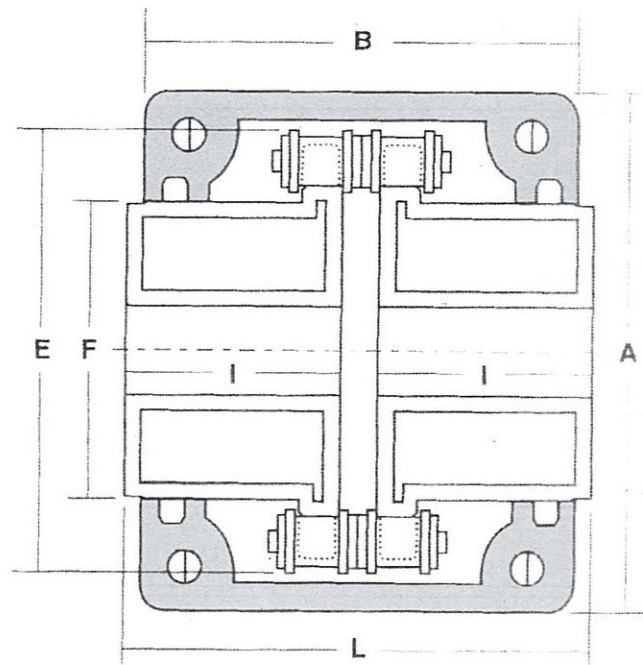

Coupling Dimensions

Coupling No.	Max Dia.	Coupling(mm)					Casting (mm)		
		E	L	F	I	Approx. Wt (kg).	A	B	Approx. Wt (kg).
KC-3012	16	45	65	27.2	29.5	0.31	69	63	0.22
KC-4012	22	62	78.4	36	36	0.73	77	72	0.30
KC-4014	28	69	79.4	45	36	1.12	84	75	0.31
KC-4016	32	77	86.4	51.5	40	1.50	92	75	0.35
KC-5014	35	86	99.7	56	45	2.15	101	85	0.47
KC-5016	40	96	99.7	64	45	2.75	112	85	0.50
KC-5018	45	106	98.2	73.5	45	3.60	122	85	0.60
KC-6018	56	127	123.5	89.5	56	6.55	142	107	1.2
KC-6020	60	139	123.5	102.5	56	8.38	158	105	1.2
KC-6022	71	151	123.5	115	56	10.4	168	117	1.2
KC-8018	80	169	141.2	115	63	13.2	190	129	1.9
KC-8020	90	185	145.2	125	65	16.2	210	137	2.5
KC-8022	100	202	157.2	142	71	21.8	226	137	2.7
KC-10020	110	233	178.8	162	80	32.4	281	153	4.1
KC-12018	125	256	202.7	173	90	43.2	307	181	5.2
KC-12022	140	304	222.7	213	100	69.1	357	181	6.7